

Kraftmessbolzen:

- Range 0.1 to 1000 tonne

- A variety of cable and connector options


- Externally or internally strain gauged

- No change to existing structure required

- Sealed to IP67

- ATEX certification available


Double shear pins

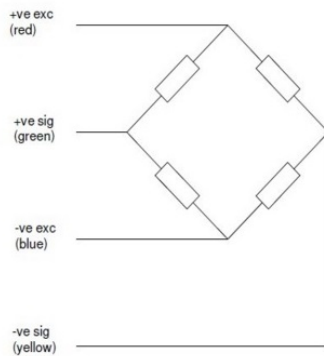

Capacities	0.1 to 1000+	tonne
Proof Load	150	% of rated load
Ultimate breaking load	500	% of rated load
Bridge Resistance	350/700/1000	ohms
Excitation	5 to 10	Volts (dc)
Output	1.0 to 1.5	mV/V
Non-Linearity	±1%	typical
Non-Repeatability	±0.04%	optimum
Environmental	IP67	
Operating Temp. Range	-20 to +70	°C
Temp. Coefficient on Zero	<0.02	% Capacity/°C
Temp Coefficient on Span	<0.02	% Capacity/°C
Signal cable	5m polyurethane 4 core	

Product Description

Load measuring pins are designed for many diverse applications as direct replacements for clevis or pivot pins. They have many advantages over other load sensors in that they do not normally require any change to the mechanical structure being monitored. Load pins are typically used in rope, chain and brake anchors, sheaves, shackles, bearing blocks and pivots.



Options:

- Special anti rotation / locking plates
- Internal greaseways
- Plug / Socket breakdown at pin
- Second redundancy gauge bridge
- Internal signal amplifier
- Witness by Lloyds Reg. of Shipping ABS etc.
- Single shear pins